


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions		Approved	Date
		Description/Approved/Date		M.H.	
				Checked	Date
				M.H.	
				Drawn	Date
				T.J.A.	
		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike			

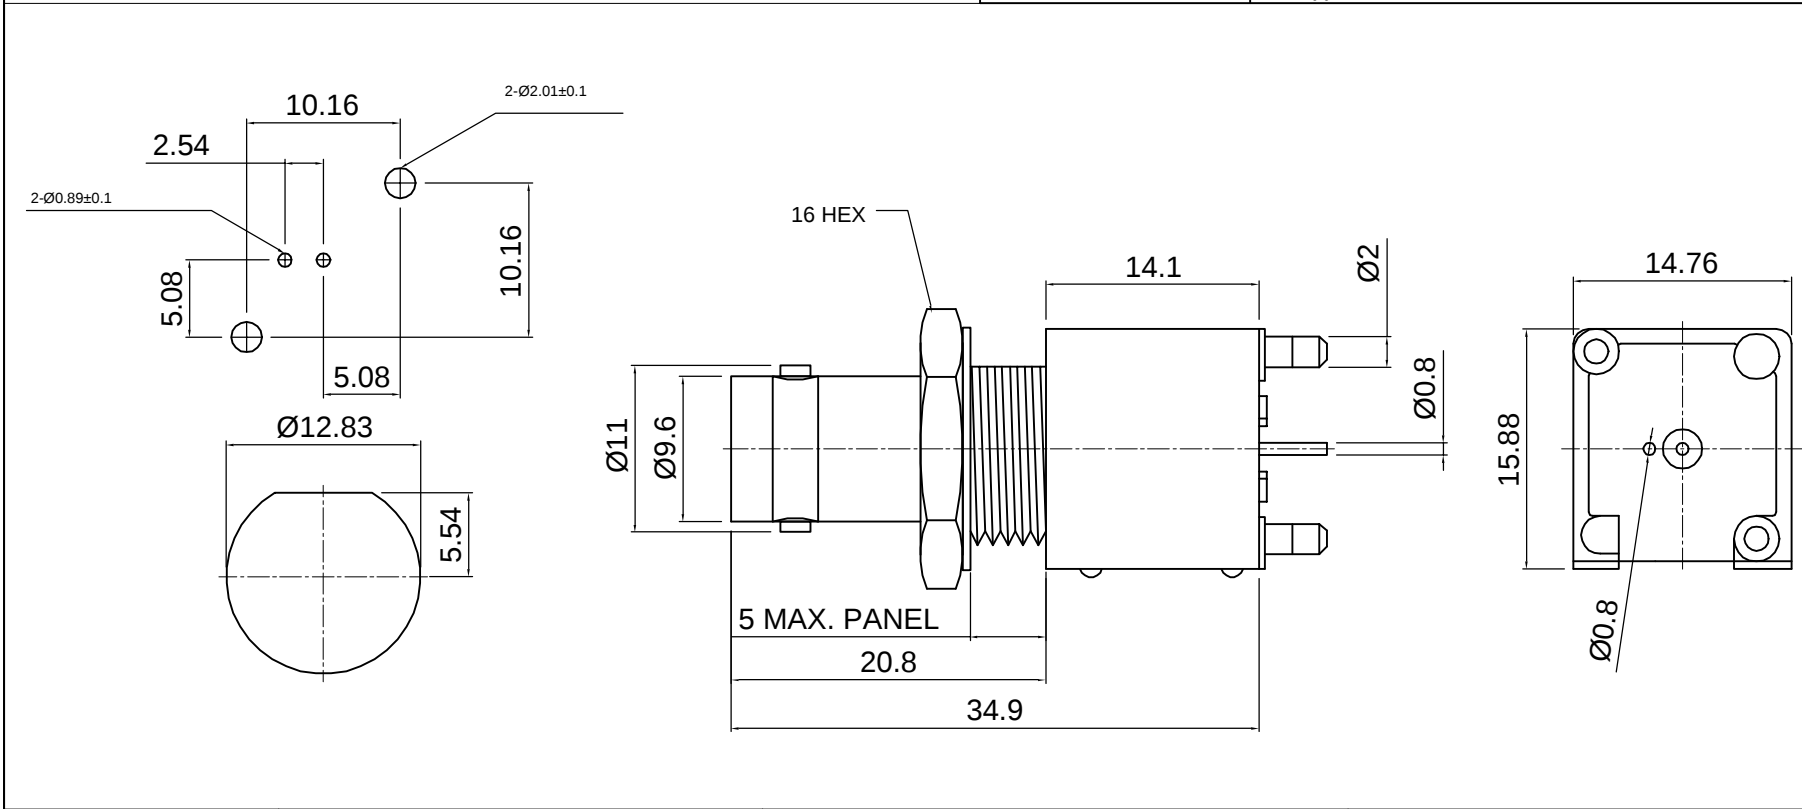

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-7BSF54HNPM		
Connector Body	Zinc Alloy	Nickel, Note 9			
Center Contact: Female	P. Bronze	Gold, Note 11	Description BNC PCB vertical thru hole jack. Nickel plated zinc alloy casing.		
Insulation	Polypropylene	None			
Ferrule	--	--	Polypropylene dielectric. 75 Ohm part.		
Gasket	--	None			
Hex Nut	Brass, Note 1	Nickel, Note 9	Scale 2:1	Drawing No. 7BSF54HNPM	File Name 7BSF54HNPM
Lock Washer	Brass	Nickel, Note 9			