



<b>Tolerances</b> 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1	<b>Revisions</b>		<b>Approved</b>	<b>Date</b>
	Description/Approved/Date	Checked	M.H.	Date
<b>Dimensions are in Millimeters</b>	<b>NOTES</b> (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike
	1. Per QQ-B-626	7. Per WW-T-799	10. Per QQ-P-35	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike
2. Per QQ-S-764	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	3. Per QQ-C-530		
4. Per QQ-B-750				

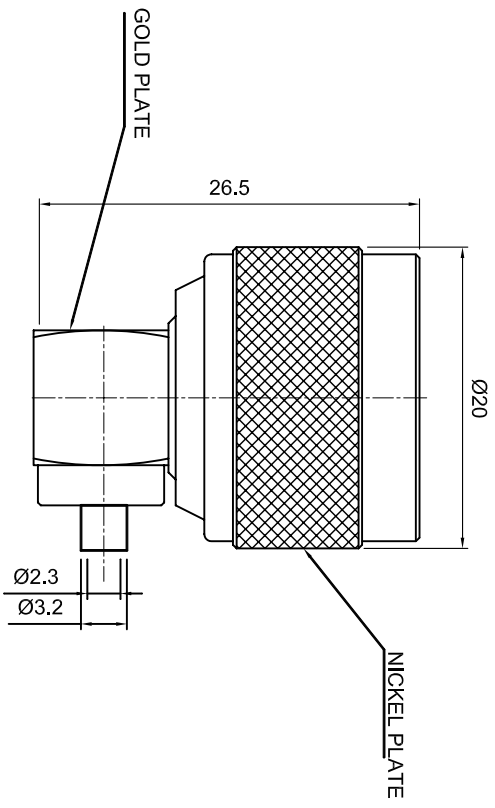

<b>ITEM</b>	<b>MATERIAL</b>	<b>FINISH</b>	 <p>Lighthouse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: <b>LTI-NL/M31NT-086</b></p>	
Connector Body	Brass, Note 1	Nickel, Note 9		
Center Contact: Male	Brass, Note 1	Gold, Note 11		
Insulation	Teflon, Note 5	None		
Ferrule	--	--		
Gasket	--	--	Description N right angle solder plug for .086" semi-rigid cable	
Hex Nut	--	--	Scale 2:1	Drawing No. N/NL/M31-086
Lock Washer	--	--		File Name NL/M31-086