


Revisions	Approved	Date
Description/Approved/Date	M.H.	07/24/99
	Checked	Date
	M.H.	07/24/99
	Drawn	Date
	K.R.E.	07/20/99


Tolerances
1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are in Millimeters

NOTES (plating thickness in micro-inches):
1. Per QQ-B-626
2. Per QQS-764
3. Per QQ-C-530
4. Per QQ-B-750
5. Per MIL-P-19468
6. Per ZZ-R-765
7. Per WW-T-799
8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike
9. Nickel pl. 100 min. over copper strike
10. Per QQ-P-35
11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

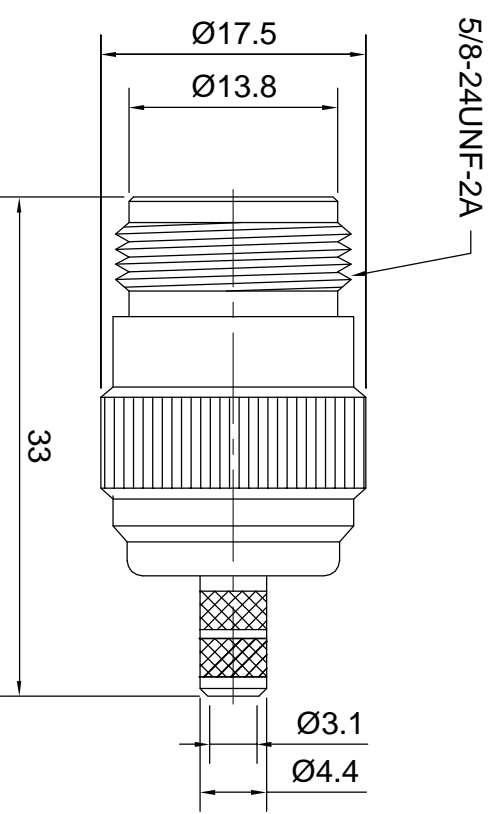

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

		
Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LT-NSF11NT-58		
Description: N crimp jack for RG-58		
Scale: 2:1	Drawing No. N/NSF11-58	File Name NSF11-58