

Revisions		Approved	Date
Description/Approved/Date	M.H.	M.H.	05/28/02
	Checked	M.H.	05/25/02
	Drawn	K.R.E.	05/24/02


  

Tolerances	
1-20=+/-0.2	
20-30=+/-0.3	
30-40=+/-0.4	
40-50=+/-0.5	
50-100=+/-0.75	
100-300=+/-1.5	
Angles=+/-1	

**Dimensions are in Millimeters**

NOTES (plating thickness)	
In micro-inches:	
1. Per QQ-B-626	5. Per MIL-P-19468
2. Per QQ-S-764	6. Per ZZ-R-765
3. Per QQ-C-530	7. Per WW-1-799
4. Per QQ-B-750	8. Gold pl. 50 min. over nickel pl. 50 min. over copper strike
	9. Nickel pl. 100 min. over copper strike
	10. Per QQ-P-35
	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

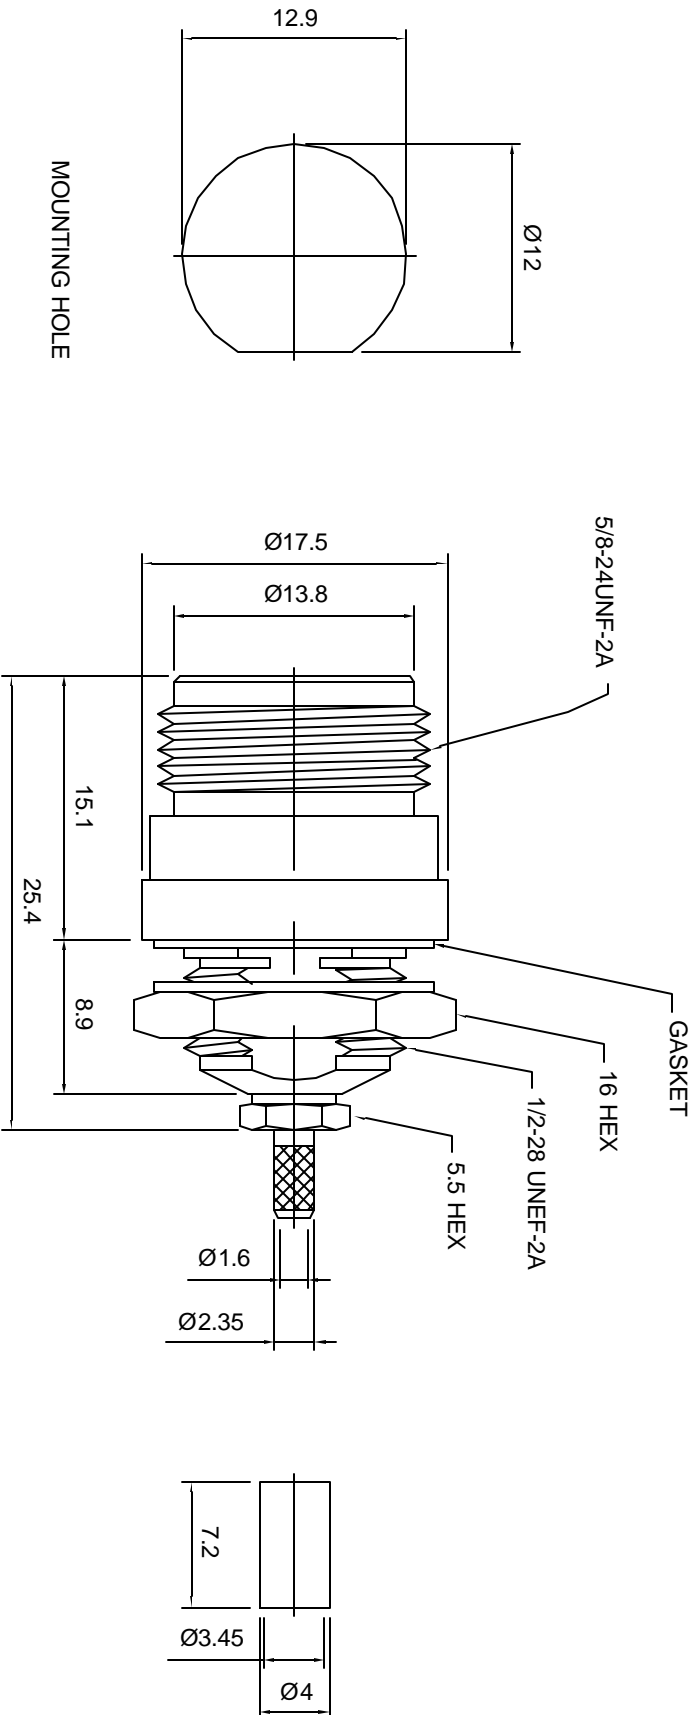

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	Silicone Rubber, Note 6	None
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

	<b>Lighthouse Technologies, Inc.</b> 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: <b>LTI-NSF13FNT-D316</b>
	Description N front mount bulkhead crimp jack for RD-316 (double shielded), Nickel plated brass body, teflon dielectric.

Scale	Drawing No.	File Name
2:1	M/NSF13F-D316	NSF13F-D316