


LENGTH TOLERANCE FOR CABLE ASSEMBLIES	
Inches	Millimeters
0 - 2IN +/- 0.040	0 - 51 +/- 1
2IN - 6IN +/- 0.080	51 - 153 +/- 2
6IN - 12IN +/- 0.140	153 - 305 +/- 3.5
12IN - 48IN +/- 0.250	305 - 1219 +/- 6.4
48IN - 144IN (12FT) +/- 0.500	1219 - 3658 +/- 13
144IN (12FT) - ABOVE +/- 1.0	3658 - ABOVE +/- 25
UNLESS OTHERWISE SPECIFIED ON DRAWING	


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CBD-SALRF3GT-SALRMGT-4IN-6O (4 INCHES)
CBD-SALRF3GT-SALRMGT-100MM-6O (100 MILLIMETERS)

REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	M. LARSEN	7/26/2024

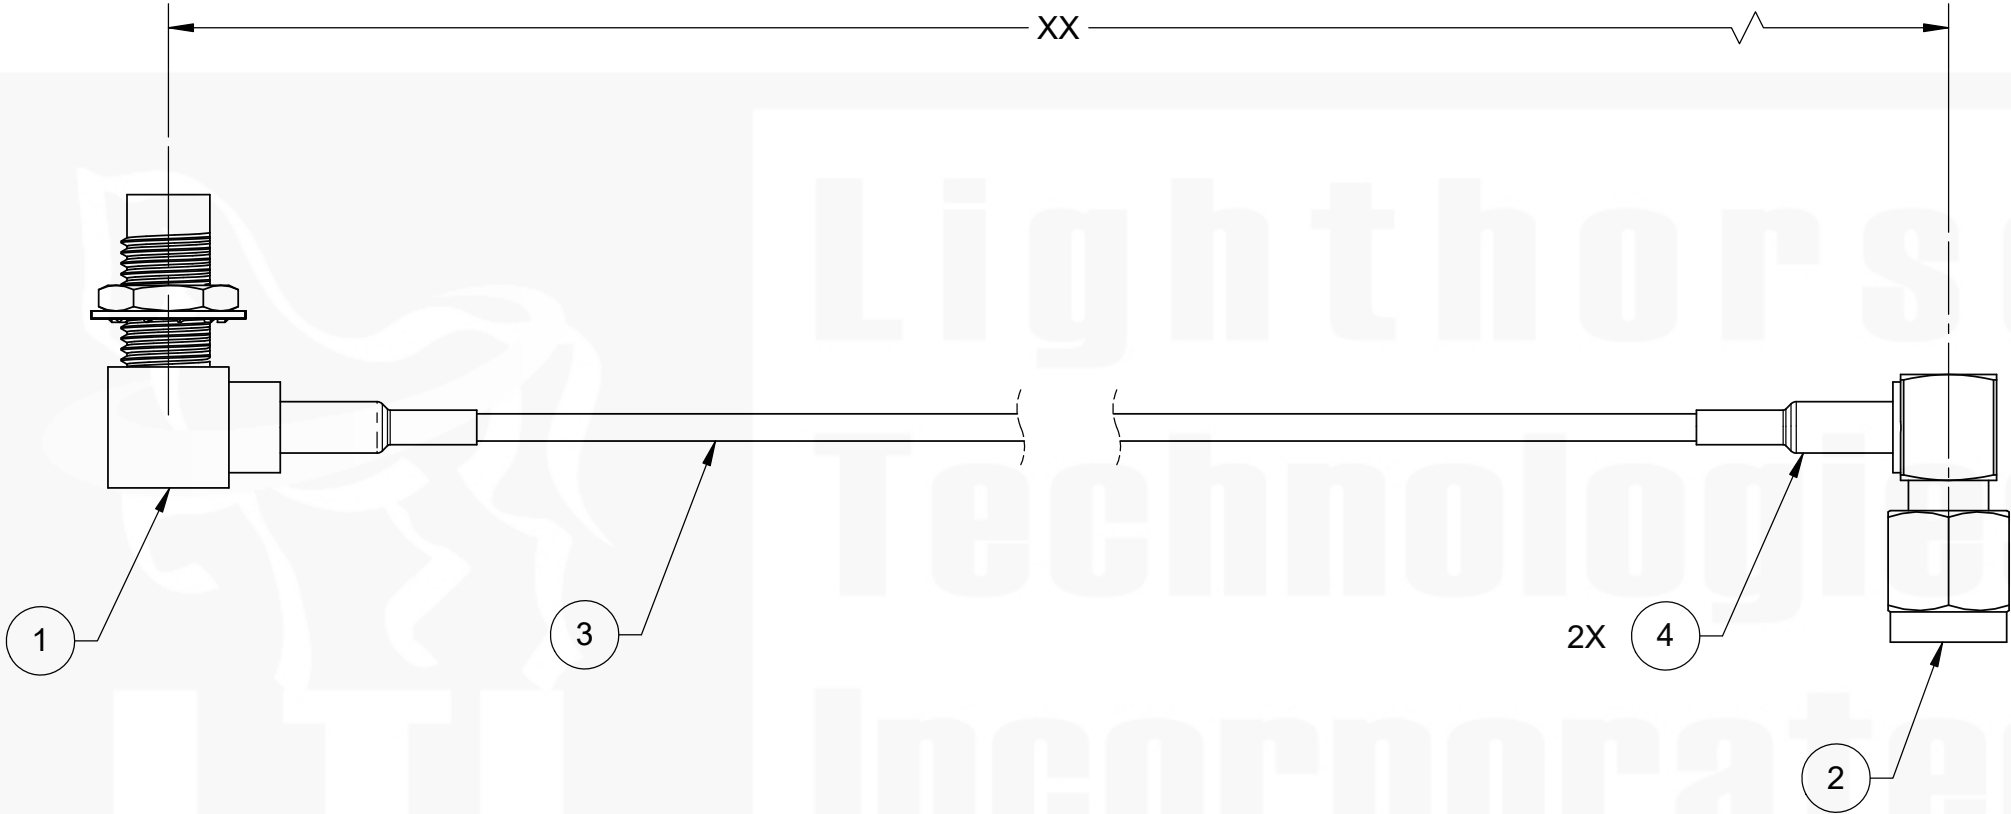

ITEM	PART NUMBER	DESCRIPTION	QTY
1	SALRF13RGT-316	RP-SMA, RIGHT ANGLE, REV POL JACK, BLKHD MNT, CABLE CRIMP	1
2	SALRM11GT-316	RP-SMA ,RIGHT ANGLE, REV POL PLUG, CABLE CRIMP	1
3	RG-316	CABLE, RG-316 COAX	AR
4	1635F-3/16"	.1875 (3/16) DIA, .75 LENGTH, GREEN	2

DO NOT SCALE DRAWING			 Lighthorse Technologies San Diego, CA WWW.RFCONNECTOR.COM		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
DIMENSIONS ARE IN MILLIMETERS					
X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30°		 THIRD ANGLE PROJECTION	TITLE: CABLE ASSEMBLY, RP-SMA, R/A JACK, BLKHD MNT, CRIMP TO RP-SMA, PLUG, CRIMP USING RG-316 CABLE, OPPOSITE ORIENTATION		
CUSTOMER APPROVAL					
SIGN / DATE:			SIZE	PART/DWG. NO:	REV
ENG APPR.			B	CBD-SALRF3GT-SALRMGT-xx-60	1
CHECKED					
DRAWN M. LARSEN 7/26/2024					
NAME DATE			SCALE: 2:1 FILE NAME		SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

