





	<b>Tolerances</b> 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 <b>Dimensions are in Millimeters</b>	Revisions	Approved	Date
		Description/Approved/Date	M.H.	04/05/01
			Checked	Date
			M.H.	04/05/01
		Drawn	Date	
		K.R.E.	04/05/01	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626	6. Per ZZ-R-765	7. Per WW-T-799	10. Per QQ-P-35	
2. Per QQ-S-764	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		
3. Per QQ-C-530				
4. Per QQ-B-750				

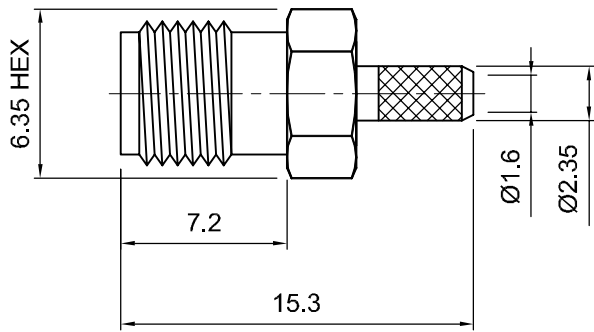

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Gold, Note 8		5640 Kearny Mesa Road, Suite N San Diego, California 92111	
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11		Part Number: <b>LTI-SASF11GT-316</b>	
Insulation	Teflon, Note 5	None	Description SMA straight crimp jack for RG-316.		
Ferrule	Annealed Copper, Note 7	Same as body	Gold plated brass body, teflon dielectric.		
Gasket	--	--	Scale	Drawing No.	File Name
Hex Nut	--	--	3:1		SASF11-316-J
Lock Washer	--	--			