
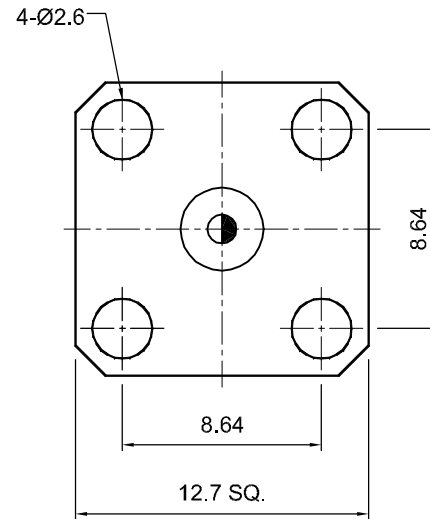



	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	03/18/00
		1. Shoulder removed, overall length / M.H. / 07/21/02	Checked	Date
			M.H.	03/18/00
		Drawn	Date	
		K.R.E.	03/16/00	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626	6. Per ZZ-R-765	7. Per WW-T-799	10. Per QQ-P-35	
2. Per QQ-S-764	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		
3. Per QQ-C-530				
4. Per QQ-B-750				

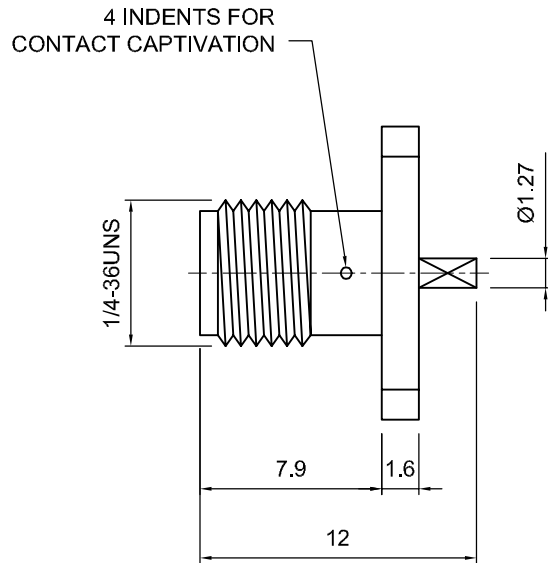

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-SASF82SFGT
Connector Body	Brass, Note 1	Gold, Note 8	
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11	
Insulation	Teflon, Note 5	None	
Ferrule	--	--	
Gasket	--	--	
Hex Nut	--	--	
Lock Washer	--	--	
Description			SMA panel mount jack with half round post termination and 4-hole square flange. Gold plated brass body, teflon dielectric.
Scale	Drawing No.	File Name	
3:1	SMA/SASF82SF	SASF82SF	