


Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions Description/Approved/Date	Approved M.H.	Date 05/23/00
		Checked M.H.	Date 05/23/00
		Drawn K.R.E.	Date 05/21/00
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike			

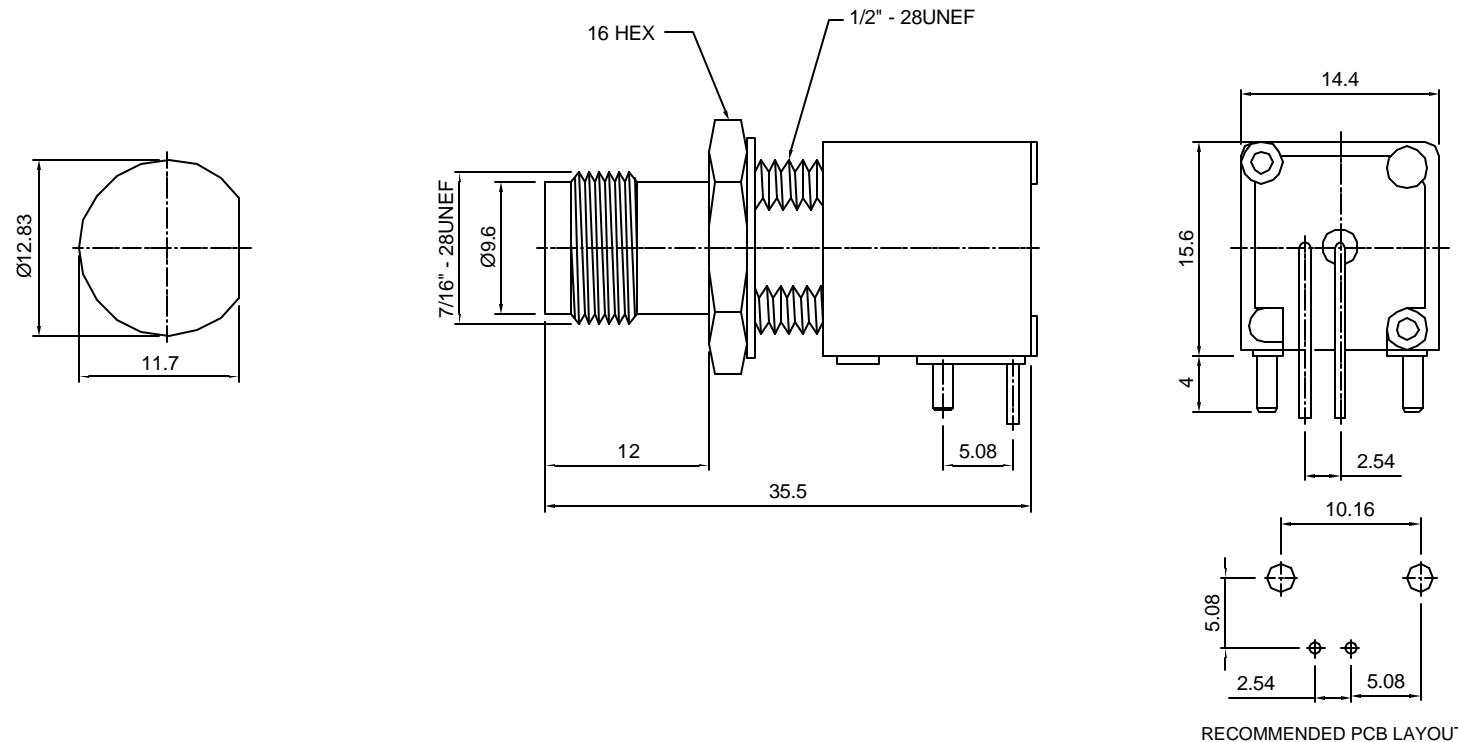

RECOMMENDED PCB LAYOUT

ITEM	MATERIAL	FINISH
Connector Body	Zinc Alloy	Nickel, Note 9
Center Contact: Female	Phosphor Bronze, Note 4	Gold, Note 11
Insulation	Polypropylene	None
Ferrule	--	--
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body

Lighthouse Technologies, Inc.
 4907 Morena Boulevard, #1411
 San Diego, California 92117

Part Number:
LTJ-TLF54HNPM

Description		
TNC commercial right angle PCB jack, high profile (15.6 mm).		
Nickel plated diecast body, PP dielectric.		
Scale	Drawing No.	File Name
2:1	TNC/TLF54HNPM-DC2	TLF54HNPM-DC2