


Tolerances

1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are in MillimetersRevisions
Description/Approved/DateApproved
M.H.Date
03/15/00Checked
M.H.Date
03/15/00Drawn
K.R.E.Date
03/11/00

NOTES (plating thickness in micro-inches):
1. Per QQ-B-626
2. Per QQ-S-764
3. Per QQ-C-530
4. Per QQ-B-750
5. Per MIL-P-19468
6. Per ZZ-R-765
7. Per WW-T-799
8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
9. Nickel pl. 100 min. over copper strike
10. Per QQ-P-35
11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike

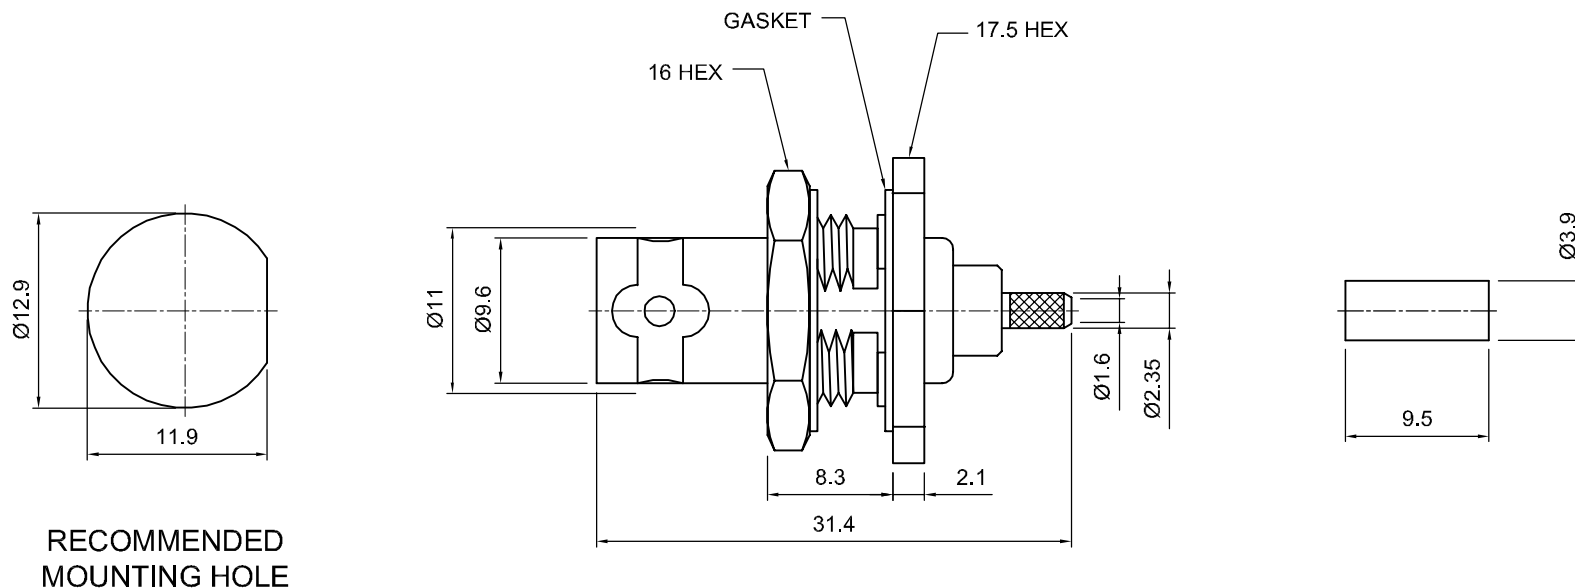

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-7BSF13RNT-179		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Phosphor Bronze, Note 4	Gold, Note 11	Description 75 ohm BNC bulkhead crimp jack for RG-179 cable. Nickel plated		
Insulation	Teflon, Note 5	None	brass body, teflon dielectric.		
Ferrule	Annealed Copper, Note 7	Same as body	Scale 2:1	Drawing No.	File Name 7BSF13-179
Gasket	Silicone Rubber, Note 6	None			
Hex Nut	Brass, Note 1	Same as body			
Lock Washer	Brass, Note 1	Same as body			