



Tolerances		Revisions	
1-20=+/-0.2		Approved	Date
20-30=+/-0.3		M.H.	11/07/98
30-40=+/-0.4		Checked	Date
40-50=+/-0.5		M.H.	11/07/98
50-100=+/-0.75		Drawn	Date
100-300=+/-1.5		K.R.E.	11/07/98
Angles=+/-1			
Dimensions are in Millimeters		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-1-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	

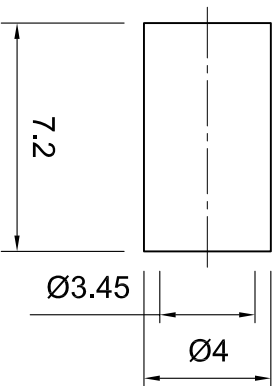

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: M	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

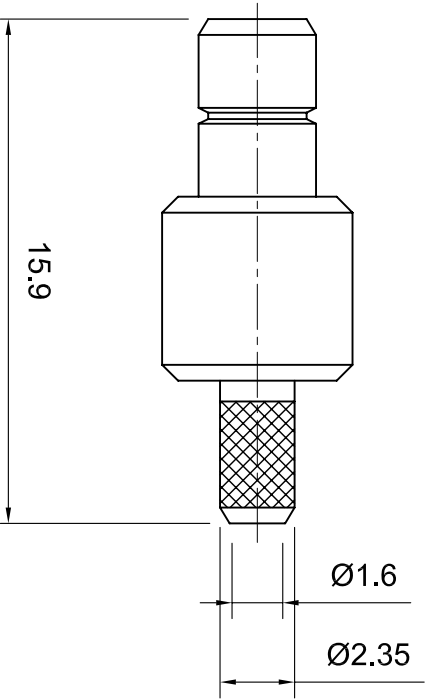

Lighthouse Technologies, Inc.
 4907 Morena Boulevard, #1411
 San Diego, California 92117
 Part Number:
LTI-7SBSF11GT-179

Description 75 ohm SMB Jack, Crimp type for RG 179		
Scale 1:1	Drawing No. 7SBSF11GT-179	File Name 7SBSF11GT-179