
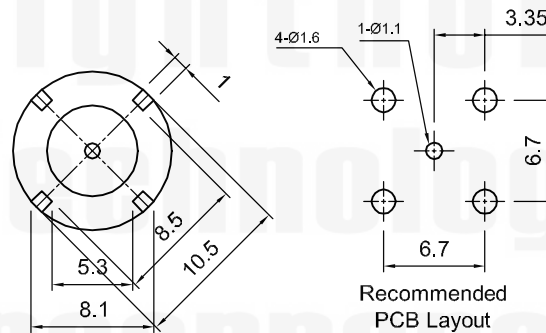


Tolerances

1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1

Dimensions are in Millimeters

Revisions	Approved	Date
Description/Approved/Date	M.H.	
	Checked	Date
	M.H.	
	Drawn	Date
	T.J.A.	11/09/06
NOTES (plating thickness in micro-inches):		
1. Per QQ-B-626	5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	6. Per ZZ-R-765	10. Per QQ-P-35
3. Per QQ-C-530	7. Per WW-T-799	11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	

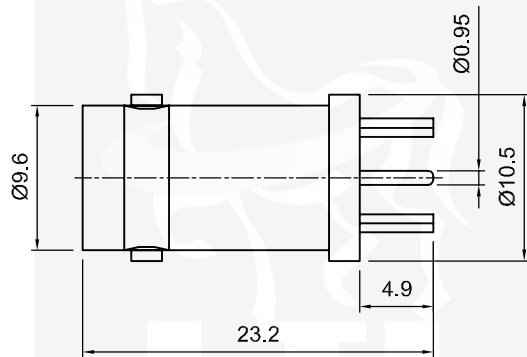

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-BSF54MND		
Connector Body	Brass, Note 1	Nickel, Note 9			
Center Contact: Female	Brass, Note 1	Gold, Note 11	Description BNC PCB thru hole jack (medium version).		
Insulation	Delrin	None	Nickel plated brass body, Delrin dielectric.		
Ferrule			Scale 2:1	Drawing No.	File Name BSF54M
Gasket					
Hex Nut					
Lock Washer					