


All components used in this connector conform to RoHS standards. Approved by: Date:	LEAD FREE  RoHS COMPLIANT	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	<table><tr><td>Revisions</td><td>Approved</td><td>Date</td></tr><tr><td>Description/Approved/Date</td><td>M.H.</td><td>09/12/04</td></tr><tr><td></td><td>Checked</td><td>Date</td></tr><tr><td></td><td>M.H.</td><td>09/12/04</td></tr><tr><td></td><td>Drawn</td><td>Date</td></tr><tr><td></td><td>K.R.E.</td><td>09/12/04</td></tr></table>	Revisions	Approved	Date	Description/Approved/Date	M.H.	09/12/04		Checked	Date		M.H.	09/12/04		Drawn	Date		K.R.E.	09/12/04
		Revisions	Approved	Date																	
		Description/Approved/Date	M.H.	09/12/04																	
			Checked	Date																	
			M.H.	09/12/04																	
	Drawn	Date																			
	K.R.E.	09/12/04																			
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike																					

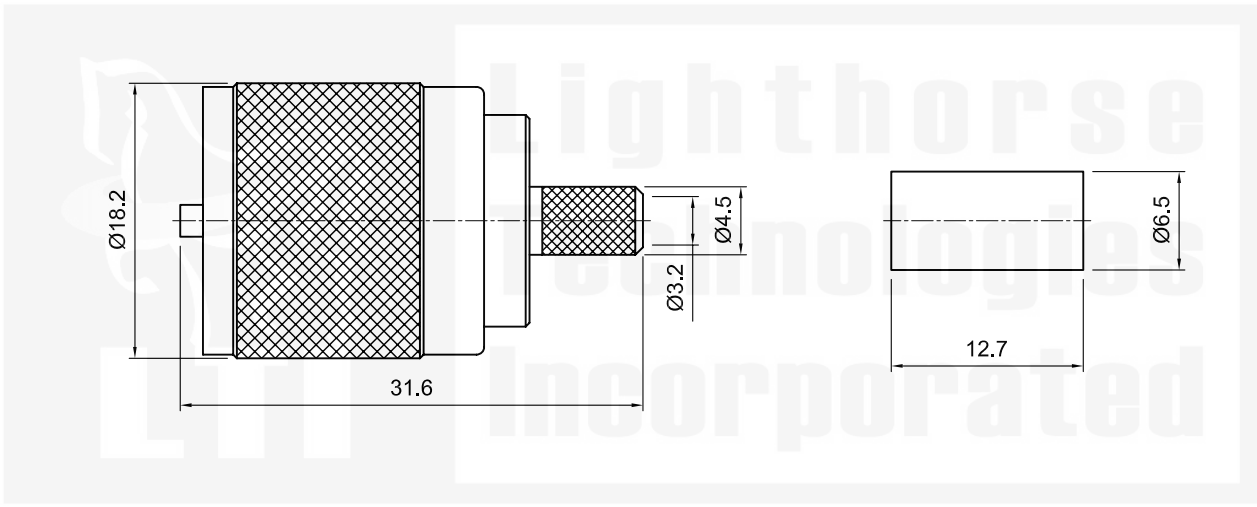

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 9511 Ridgehaven Court, Suite B San Diego, California 92123 Part Number: LTI-USM11ND-58			
Connector Body	Brass, Note 1	Nickel, Note 9				
Center Contact: M	Brass, Note 1	Gold, Note 11				
Insulation	Delrin	--				
Ferrule	Annealed Copper, Note 7	Same as body				
Gasket	--	--				
Hex Nut	--	--				
Lock Washer	--	--				
			Description UHF crimp plug for RG- 58 cable.			
			Nickel plated Brass body, Delrin dielectric.			
			Scale 2:1	Drawing No.	File Name USM11-58	