



APPROVED _____	DATE _____	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions Description/Approved/Date	Approved M.H.	Date
				Checked M.H.	Date
			Drawn K.R.E.	Date 12/18/02	
			NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750	5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike

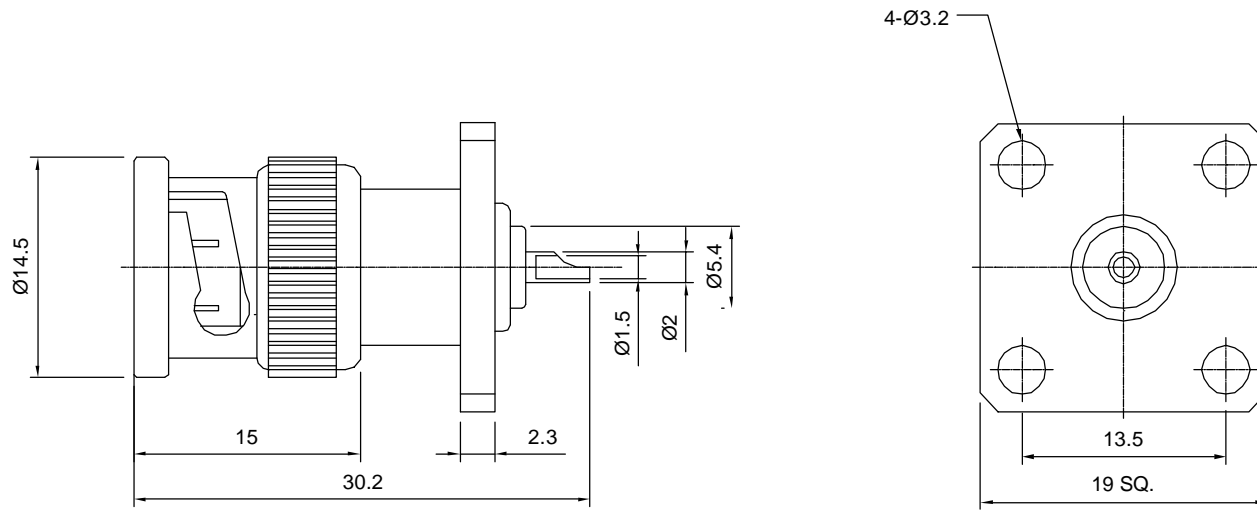

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: Male	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	--	--
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

	Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117	
	Part Number: LTI-7BSM42NT-X1	
Description 75 ohm BNC panel mount plug with solder cup termination. Nickel plated, teflon diel., special flange with 13.5 mm o.c. mounting holes.		
Scale 2:1	Drawing No. BNC/BSM42	File Name BSM42