



	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	11/17/00
			Checked	Date
			M.H.	11/17/00
		Drawn	Date	
		K.R.E.	11/17/00	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626	6. Per ZZ-R-765	7. Per WW-T-799	10. Per QQ-P-35	
2. Per QQ-S-764	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		
3. Per QQ-C-530				
4. Per QQ-B-750				

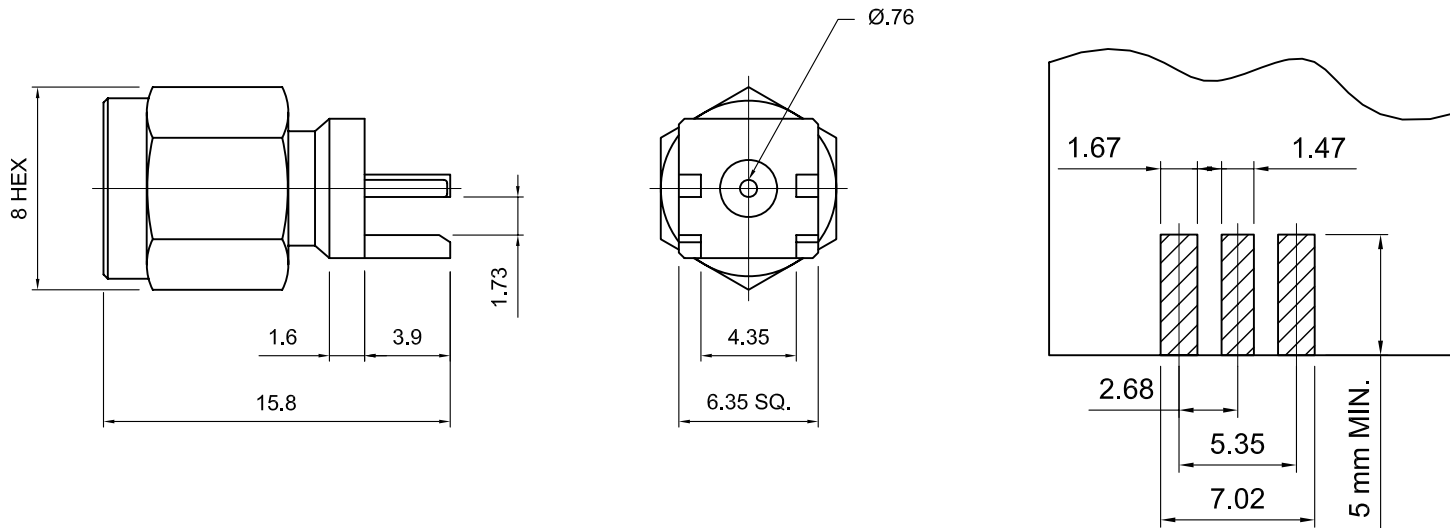

PCB Layout

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 5640 Kearny Mesa Rd. Suite N. San Diego, California 92111 Part Number: SASM55GT		
Connector Body	Brass, Note 1	Gold, Note 8	Description SMA End Launch Plug, Gold plated Brass Body		
Center Contact: M	Brass, Note 11	Gold, Note 11			
Insulation	Teflon, Note 5	None	Teflon dielectric. for 0.062" PCB		
Ferrule	--	--	Scale	Drawing No.	File Name
Gasket	--	--	3:1	SASM55GT	SASM55
Hex Nut	--	--			
Lock Washer	--	--			